

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”

IS 799 (1985): Ammonia, liquor [CHD 1: Inorganic Chemicals]



“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”



“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”

BLANK PAGE



IS : 799 - 1985
(Reaffirmed 2010)

Indian Standard
SPECIFICATION FOR
AMMONIA, LIQUOR
(Second Revision)

Third Reprint SEPTEMBER 2004

UDC 661.512

© Copyright 1986

BUREAU OF INDIAN STANDARDS
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002

AMENDMENT NO. 1 NOVEMBER 1988
TO
IS : 799 - 1985 SPECIFICATION FOR AMMONIA,
LIQUOR
(*Second Revision*)

(*Page 3, clause 0.3*) — Insert the following new clause after **0.3**:
'0.3.1 Liquid ammonia finds application as a water treatment chemical in boiler system.'

(CDC 56)

Indian Standard

SPECIFICATION FOR AMMONIA, LIQUOR

(*Second Revision*)

Acids, Alkalis and Halides Sectional Committee, CDC 56

Chairman

PROF. M. M. TAQUI KHAN

Representing

Central Salt & Marine Chemicals Research Institute
(CSIR), Bhavnagar

Members

DR. G. D. BHAT (<i>Alternate</i> to Prof. M. M. Taqui Khan)	
SHRI B. K. ANAND	Punjab National Fertilizers & Chemicals Ltd, Chandigarh
SHRI R. C. JAIN (<i>Alternate</i>)	
SHRI M. L. BHAMBANI	National Test House, Calcutta
SHRI T. K. DUTTA (<i>Alternate</i>)	
SHRI R. C. BHATTACHARYA	Directorate General of Technical Development, New Delhi
SHRI R. N. DAS	Bengal Chemicals and Pharmaceuticals Ltd, Calcutta
SHRI P. N. HALDAR (<i>Alternate</i>)	
SHRI M. V. DESAI	The Atul Products Ltd, Atul
DR J. M. TURFL (<i>Alternate</i>)	
SHRI O. C. DUTTA ROY	Shriram Foods & Fertilizer Industries, New Delhi
SHRI S. K. NANDA (<i>Alternate</i>)	
SHRI B. L. GUPTA	Kothari Industrial Corporation Ltd, Madras
DR H. V. R. IENGAR	E. I. D.-Parry (India) Ltd, Madras
DR V. C. NAIR (<i>Alternate</i>)	
SHRI N. V. KAMBLE	Saurashtra Chemicals, Porbandar
SHRI L. K. MALAVIYA (<i>Alternate</i>)	
SHRI V. B. KHANNA	Directorate General of Supplies & Disposals, New Delhi
SHRI N. K. KANSAL (<i>Alternate</i>)	
SHRI MANMOHAN SINGH	Indian Paper Mills Association, Calcutta
SHRI N. K. GUPTA (<i>Alternate</i>)	

(*Continued on page 2*)

© Copyright 1986

BUREAU OF INDIAN STANDARDS

This publication is protected under the *Indian Copyright Act* (XIV of 1957) and reproduction in whole or in part by any means except with written permission of the publisher shall be deemed to be an infringement of copyright under the said Act.

IS : 799 - 1985

(Continued from page 1)

<i>Members</i>	<i>Representing</i>
DR B. S. NAGAR	Indian Dyestuff Industries Ltd, Bombay
SHRI N. R. FADNIS (Alternate)	
DR V. N. NIGAM	Ministry of Defence (DgI)
SHRI K. B. DUTTA (Alternate)	
DR ANIL PANDIT	Deepak Nitrite Ltd, Vadodara
SHRI J. T. VORA (Alternate)	
SHRI M. D. PATEL	Gujarat State Fertilizers Co Ltd, Vadodara
SHRI R. N. CHOKSHI (Alternate)	
SHRI N. K. SACHAR	Gujarat Alkalis & Chemicals Ltd, Vadodara
SHRI J. B. SHARMA (Alternate)	
SHRI V. S. SAXENA	Ballarpur Industries Ltd, New Delhi
SHRI J. S. TALWAR (Alternate)	
DR N. SEN	Indian Soap & Toiletries Makers Association, Bombay
DR N. N. SHARMA	Tata Chemicals Ltd, Bombay
SHRI K. H. PAREKH (Alternate)	
SHRI S. K. SUBBAROYAN	Hindustan Lever Ltd, Bombay
DR A. N. BHAT (Alternate)	
SHRI P. SUBRAMANIAN	Salt Commissioner, Jaipur
SHRI B. REVANNA (Alternate)	
DR M. S. VAIDYA	The Dharamsi Morarji Chemical Co Ltd, Bombay
DR A. S. VAIDYANATHAN	Standard Alkali, Chemicals Division, Bombay
SHRI T. P. VENKATRAMAN (Alternate)	
SHRI H. K. VENKATARAMAIAH	Hindustan Organic Chemicals Ltd, Rasayani
DR K. M. VERMA	Projects & Development India Ltd, Sindri
SHRI SATISH CHANDER,	Director General, ISI (Ex-officio Member)
Director (Chem)	

Secretary

SHRI M. BAKSHI GUPTA
Deputy Director (Chem), ISI

Alkalis & Allied Products Subcommittee, CDC 56 : 2

Convener

SHRI T. P. VENKATRAMAN Standard Alkali, Chemicals Division, Bombay

Members

SHRI A. S. KULKARNI (Alternate to Shri T. P. Venkatraman)	
SHRI B. K. ANAND	Punjab National Fertilizers & Chemicals Ltd, Chandigarh
SHRI R. C. JAIN (Alternate)	
SHRI M. L. BHAMBANI	National Test House, Calcutta
SHRI M. V. DESAI	The Atul Products Ltd, Atul
DR J. M. TUREL (Alternate)	
DR K. P. GOVINDAN	Central Salt & Marine Chemicals Research Institute (CSIR), Bhavnagar
DR K. K. BOKIL (Alternate)	

(Continued on page 26)

Indian Standard

SPECIFICATION FOR AMMONIA, LIQUOR

(Second Revision)

0. FOREWORD

0.1 This Indian Standard (Second Revision) was adopted by the Indian Standards Institution on 31 October 1985, after the draft finalized by the Acids, Alkalis and Halides Sectional Committee had been approved by the Chemical Division Council.

0.2 This standard was first prepared in 1955 and was based on IND/SL 1504 Indian Defence Service Specification for ammonia, and O-A-451a US Federal Specification for ammonia, aqua (ammonium hydroxide), technical. It was revised in 1978 adding a new grade, namely, analytical reagent grade. The requirement for relative density (specific gravity) had been deleted in the first revision as it was felt that it need not be a part of the specification. However, a correlation table of relative density and percentage of ammonia was given in Appendix A.

0.3 In the present revision, alternate spectrophotometric methods for the determination of phosphates, silica and iron and an alternate method for the determination of ammonia as prescribed in ISO/DIS 7108 'Ammonia solution for industrial use — Determination of ammonia content — Titrimetric method' issued by the International Organization for Standardization have been prescribed.

0.4 For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test, shall be rounded off in accordance with IS : 2-1960*. The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

1. SCOPE

1.1 This standard prescribes the requirements and methods of sampling and test for ammonia, liquor.

*Rules for rounding off numerical values (revised).

IS : 799 - 1985

1.1.1 The material is also known as aqua ammonia, and ammonium hydroxide.

2. GRADES

2.1 There shall be two grades, namely,

- a) Technical grade intended for uses, such as cleansing agent, refrigerant, accelerator in vulcanization, and in the ammonia process of ferroprinting of drawings.
- b) Analytical reagent grade.

3. REQUIREMENTS

3.1 Description — The material shall be a clear and colourless liquid of extremely pungent and characteristic odour, free from suspended matter and sediment. The material absorbs carbon dioxide from air.

3.2 The material shall comply with the requirements given in Table 1 when tested according to the methods prescribed in Appendix B. Reference to the relevant clauses of Appendix B is given in col 5 of the table.

4. PACKING AND MARKING

4.1 Packing — The material shall be packed in suitable containers fitted with stoppers bound with wire to prevent popping up of the stopper due to temperature variation, or as agreed to between the purchaser and the supplier. Ten percent ullage shall also be provided in the containers.

4.2 Marking — Each container shall be marked with the following:

- a) Name of the material and its grade;
- b) Name of the manufacturer and/or his recognized trade-mark, if any;
- c) Mass in g or volume in ml of the material;
- d) Date of manufacture; and
- e) Lot number.

4.2.1 The containers shall be kept in a cool place. Each container shall also be provided with a label containing the following warning:

**LIQUID CAUSES BURNS – VAPOUR EXTREMELY
IRRITATING : HANDLE WITH CARE**

TABLE 1 REQUIREMENTS FOR AMMONIA, LIQUOR

(Clause 3.2)

SL No.	CHARACTERISTIC	REQUIREMENT		METHOD OF TEST, REF TO CLAUSE No. IN APPENDIX B
		Technical Grade	Analytical Reagent Grade	
(1)	(2)	(3)	(4)	(5)
i)	Ammonia, percent by mass, <i>Min</i>	20.0	25.0	B-2
ii)	Residue on evaporation, per- cent by mass, <i>Max</i>	0.1	0.002	B-3
iii)	Carbonate (as CO ₂), percent by mass, <i>Max</i>	—	0.01	B-4
iv)	Chloride (as Cl), percent by mass, <i>Max</i>	—	0.000 05 (0.5 ppm)	B-5
v)	Phosphate (as PO ₄), percent by mass, <i>Max</i>	—	0.000 1 (1 ppm)	B-6
vi)	Silicate (as SiO ₂), percent by mass, <i>Max</i>	—	0.00 1 (10 ppm)	B-6
vii)	Sulphate (as SO ₄), percent by mass, <i>Max</i>	—	0.000 2 (2 ppm)	B-7
viii)	Sulphide (as S), percent by mass, <i>Max</i>	—	0.000 01 (0.1 ppm)	B-8
ix)	Arsenic (as As), percent by mass, <i>Max</i>	—	0.000 005 (0.05 ppm)	B-9
x)	Calcium and magnesium (as Ca), percent by mass, <i>Max</i>	—	0.000 4 (4 ppm)	B-10
xi)	Copper (as Cu), percent by mass, <i>Max</i>	—	0.000 01 (0.1 ppm)	B-11
xii)	Iron (as Fe), percent by mass, <i>Max</i>	—	0.000 02 (0.2 ppm)	B-12
xiii)	Heavy metals (as Pb), per- cent by mass, <i>Max</i>	—	0.000 04 (0.4 ppm)	B-13
xiv)	Reducing substances (as O), percent by mass, <i>Max</i>	—	To pass test	B-14
xv)	Pyridine and homologues, percent by mass, <i>Max</i>	—	To pass test	B-15

IS : 799 - 1985

4.2.2 In case of analytical reagent grade, only limits of the material with respect to the characteristics specified in col 4 of Table 1 shall also appear on the label.

4.2.3 The product may also be marked with Standard Mark.

4.3 The use of the Standard Mark is governed by the provisions of Bureau of Indian Standards Act, 1986 and the Rules and Regulations made thereunder. The details of conditions under which the licence for the use of Standard Mark may be granted to manufacturers or producers may be obtained from the Bureau of Indian Standards.

5. SAMPLING

5.1 Representative test samples of the material shall be drawn and adjudged as prescribed in Appendix C.

APPENDIX A

(Clause 0.2)

**CORRELATION TABLE OF RELATIVE DENSITY AND PERCENT
BY MASS OF AMMONIA, LIQUOR AT 27/27°C**

<i>Relative Density at 27/27°C</i>	<i>Percent by Mass</i>	<i>Relative Density at 27/27°C</i>	<i>Percent by Mass</i>
0.992 9	1.00	0.933 3	16.48
0.991 2	1.50	0.931 8	16.80
0.989 4	2.00	0.930 2	17.25
0.980 7	4.06	0.928 7	17.73
0.979 0	4.37	0.927 2	18 11
0.977 3	4.89	0.925 6	18.57
0.975 6	5.32	0.924 1	19.07
0.973 9	5.78	0.922 6	19.17
0.972 2	5.98	0.921 1	19.89
0.970 5	6.41	0.919 5	20.35
0.968 9	6.84	0.918 0	20.83
0.967 2	7.27	0 9165	21.31
0.965 5	7.61	0.915 0	21.66
0.963 9	8.07	0.913 5	22.11
0.962 2	8.49	0.912 1	22.53
0.960 5	8.93	0.910 6	23.07
0.958 9	9.27	0.909 1	23.42
0.957 3	9.72	0.907 6	23.91
0.955 6	10.17	0.906 1	24.41
0.954 0	10.62	0.904 7	24.93
0.952 4	10.99	0.903 2	25.32
0.950 8	11.44	0.901 8	25.81
0.949 2	11.93	0.900 3	26.30
0.947 5	12.39	0.898 9	26.81
0.945 9	12.76	0.897 4	27.11
0.944 4	13.19	0.896 0	27.65
0.942 8	13.64	0.894 6	28.19
0.941 2	14.12	0.893 2	28.68
0.939 6	14.58	0.891 8	29.17
0.938 0	14.90	0.890 2	29.67
0.936 5	15.28	0.888 8	30.16
0.934 9	15.93		

APPENDIX B

(Clause 3.2, and Table 1)

METHODS OF TEST FOR AMMONIA, LIQUOR

B-1. QUALITY OF REAGENTS

B-1.1 Unless specified otherwise, pure chemicals and distilled water (*see* IS : 1070-1977*) shall be used in tests.

NOTE 1 — 'Pure chemicals' shall mean chemicals that do not contain impurities which affect the results of analysis.

NOTE 2 — Lunge-Ray pipette is recommended for carrying out analysis of the material.

B-2. DETERMINATION OF AMMONIA

B-2.0 Ammonia may be determined by either of the two methods, namely, Method A and Method B. In case of dispute Method B shall be adopted.

B-2.1 Method A

B-2.1.1 Reagents

B-2.1.1.1 *Standard sulphuric acid* — 0.5 N.

B-2.1.1.2 *Methyl red indicator* — Dissolve 0.5 g of water soluble methyl red in water and dilute the solution to one litre.

B-2.1.1.3 *Caustic soda solution* — 0.5 N, freshly standardized.

B-2.1.2 *Procedure* — Accurately weigh a 15 ml capacity ground glass stoppered weighing bottle containing 10 to 12 ml of water. Open the ammonia bottle and insert a clean and dry glass tube of about 5 mm bore to half the height of the liquid and transfer 1 to 15 ml of the material to the weighing bottle immediately replace the glass stopper and weigh. Place the weighing bottle in about 200 ml of water containing 50 ml of 0.5 N sulphuric acid and a few drops of methyl red indicator.

Due to the mass of the water and ammonia contained in the bottle, it will remain immersed in the acid. Open the stopper under the acid by manipulating with a glass rod and titrate the excess of acid with standardized caustic soda solution to a faint yellow end point.

B-2.1.2.1 Carry out a blank with all the reagents used for the test.

*Specification for water for general laboratory use (*second revision*).

B-2.1.3 Calculation

$$\text{Ammonia, percent by mass} = \frac{1.703 (V_1 - V_2) N}{M}$$

where

V_1 = volume in ml of standard sodium hydroxide solution used in the blank,

V_2 = volume in ml of standard sodium hydroxide solution used in the test with the material,

N = normality of standard sodium hydroxide solution, and

M = mass in g of the material taken for the test.

B-2.2 Method B**B-2.2.1 Reagents**

B-2.2.1.1 *Boric acid* — 2 percent.

B-2.2.1.2 *Standard sulphuric acid* solution — 0.5 N.

B-2.2.1.3 — *Methyl red* — 0.1 percent. Dissolve 0.1 g of methyl red in 95 percent (v/v) ethanol and make up to 100 ml with the same ethanol.

B-2.2.2 Apparatus

B-2.2.2.1 *Spherical glass ampoule* — of thin glass, of suitable capacity and shape, for example, about 20 mm diameter, with one capillary end about 50 mm in length (a typical example is shown in Fig. 1).

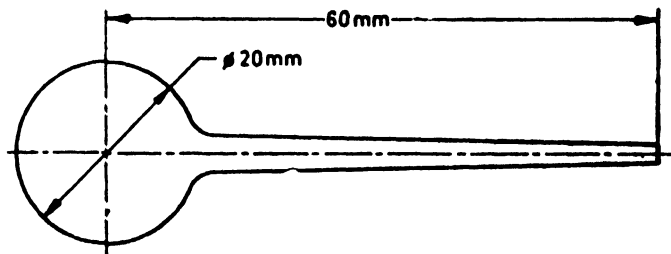


FIG. 1 SPHERICAL GLASS AMPOULE

IS : 799 - 1985

B-2.2.3 Procedure — Weigh the glass ampoule to the nearest 0.01 g. Gently heat the spherical part of the ampoule over a flame and dip the capillary end of the ampoule into the bottle containing the laboratory sample. Ensure that the ampoule is almost completely filled during cooling.

Withdraw the ampoule and dry the capillary tube carefully with filter paper. Seal the end of the capillary tube, without loss of glass, with an oxidizing flame. Allow the capillary tube to cool, wash it with water and wipe it carefully with filter paper.

Weigh the sealed ampoule accurately and calculate, by difference, the mass of the test portion.

B-2.2.3.1 Carefully place the ampoule containing the test portion into a 500 ml conical flask, fitted with a ground glass stopper, to which 50 ml of the boric acid solution, about 250 ml of water and several drops of the methyl red solution have already been added.

Stopper the conical flask and shake carefully so as to break the ampoule.

Unstopper the flask, rinse the stopper with water collecting the washings in the same flask.

Using a glass rod, grind the pieces of the ampoule, in particular those parts of the capillary tube which may have remained unbroken. Remove the glass rod, rinse it with water, collecting the washings in the same flask.

Titrate with the sulphuric acid solution until the indicator changes from yellow to red.

B-2.2.4 Calculation

$$\text{Ammonia, percent by mass} = \frac{1.703 V}{M}$$

where

V = volume in ml of standard sulphuric acid used, and

M = mass in g of the material taken for the test.

B-3. DETERMINATION OF RESIDUE ON EVAPORATION

B-3.1 Procedure — Measure 500 ml of the material in case of AR grade and 100 ml for technical grade in a volumetric flask. Add the whole material, in small portions, to a tared platinum crucible or other suitable dish, and evaporate to dryness on a steam bath, inside a fume cupboard. Dry the residue at $105 \pm 2^\circ\text{C}$ to constant mass.

B-3.2 Calculation

$$\text{Residue on evaporation, percent by mass} = \frac{100 M}{VS}$$

where

M = mass in g of the residue,

V = volume in ml of the material taken for the test, and

S = relative density of the material.

B-4. DETERMINATION OF CARBONATE**B-4.1 Apparatus**

B-4.1.1 *Nessler Cylinders* — 25 ml capacity.

B-4.2 Reagents

B-4.2.1 *Barium Hydroxide Solution* — saturated.

B-4.2.2 *Standard Sodium Carbonate (Anhydrous) Solution* — 0.01 N.

B-4.3 Procedure — Weigh accurately 1.5 g of the material, dilute to 20 ml with carbon dioxide-free water and add 5 ml barium hydroxide solution. Carry out a control test in the other Nessler cylinder by taking 0.5 ml of standard sodium carbonate solution, 20 ml of carbon dioxide-free water and 5 ml of barium hydroxide solution.

B-4.3.1 The material shall be taken to have passed the test if the turbidity produced in the test with the material is not greater than that produced in the control test.

B-5. DETERMINATION OF CHLORIDES**B-5.1 Apparatus**

B-5.1.1 *Nessler Cylinders* — 50 ml capacity.

B-5.2 Reagents

B-5.2.1 *Silver Nitrate Solution* — 0.1 N approximately.

B-5.2.2 *Dilute Nitric Acid* — 4 N approximately.

B-5.2.3 *Standard Chloride Solution A* — Dissolve 1.648 g of sodium chloride (dried at $105 \pm 2^\circ\text{C}$) in water and dilute to 1 000 ml in a volumetric flask. One millilitre of this diluted solution contains 1.0 mg of chloride (as Cl).

IS : 799 - 1985

B-5.2.3.1 Standard chloride solution B — Dilute 10 ml of standard chloride solution A (**B-5.2.3**) to 1 000 ml with water. One millilitre of this diluted solution contains 0.01 mg of chloride (as Cl).

B-5.3 Procedure — Accurately weigh 20 g of the material and evaporate on a steam bath until reduced to 1 ml. Then dilute with 50 ml of water and add 1 ml of dilute nitric acid and 1 ml of silver nitrate solution. Carry out a control test in the other Nessler cylinder using 1 ml of standard chloride solution B, 1 ml of dilute nitric acid, 1 ml of silver nitrate solution and 50 ml of water. Wait for 5 minutes and compare the opalescence in both the cylinders.

B-5.3.1 The material shall be taken to have passed the test if the opalescence produced in the test with the material is not greater than that produced in the control test.

B-6. DETERMINATION OF PHOSPHATE AND SILICATE

B-6.0 Two methods are prescribed for the determination of phosphate and silicate, namely colorimetric method and spectrophotometric method. The spectrophotometric method shall be adopted in case of dispute.

B-6.1 Colorimetric Method

B-6.1.1 Apparatus

B-6.1.1.1 Separating funnels — 200 to 250 ml capacity.

B-6.1.1.2 pH meter — with glass electrode.

NOTE — Alternatively, universal standard indicator paper may be used.

B-6.1.1.3 Nessler cylinders — 50 ml capacity.

B-6.2 Reagents

B-6.2.1 Dilute Sulphuric Acid — approximately 5 percent (v/v).

B-6.2.2 Ammonium Molybdate — solid.

B-6.2.3 Concentrated Hydrochloric Acid — See IS : 265-1976*.

B-6.2.4 Dilute Hydrochloric Acid — approximately 10 percent (v/v).

B-6.2.5 Dilute Hydrochloric Acid — 1 percent (v/v).

B-6.2.6 Ethyl Ether — See IS : 336-1973†.

*Specification for hydrochloric acid (*second revision*).

†Specification for ether (*second revision*).

B-6.2.7 Stannous Chloride Solution — Dissolve 2 g of stannous chloride ($\text{SnCl}_2 \cdot 2\text{H}_2\text{O}$) in concentrated hydrochloric acid and dilute to 100 ml with the acid.

B-6.2.8 *n*-Butanol

B-6.2.9 Standard Phosphate Solution — Dissolve 1.43 g of potassium dihydrogen orthophosphate (KH_2PO_4) in water and dilute to 1 000 ml in a volumetric flask. One millilitre of this solution contains 1.0 mg of phosphate (as PO_4).

B-6.2.10 Standard Silicate Solution — Fuse 2.500 g of precipitated silica with 5 g of sodium carbonate in a platinum crucible until all the silica is dissolved in the molten sodium carbonate. Cool and extract the melt with hot water. When all the solid is dissolved, add 2 to 3 g of sodium hydroxide, make up to 250 ml and store in polyethylene bottle. One millilitre of this solution contains ten milligrams of silica (as SiO_2).

B 6.2.11 Standard Phosphate-Silicate Solution — Take 10 ml of standard phosphate solution (**B-6.2.9**) and 10 ml of standard silicate solution (**B-6.2.10**) and dilute to 1 000 ml with water in a volumetric flask. One millilitre of this diluted solution is equivalent to 0.01 mg of phosphate (as PO_4) and 0.1 mg of silicate (as SiO_2). This standard phosphate-silicate solution should be freshly prepared before use.

B-6.3 Procedure — Accurately weigh 10 g of the material and evaporate on a steam bath until reduced to 1 ml. Then dilute with water, adjust to a *pH* of about 4 by addition of dilute sulphuric acid and dilute to a volume of about 75 ml. Take 1 ml of standard phosphate-silicate solution. Add 0.5 g of ammonium molybdate each to the test solution and the standard phosphate-silicate solution and when it dissolves, adjust the *pH* to 2 by adding dilute hydrochloric acid. Check the *pH* with the *pH* meter using glass electrode or universal *pH* indicator paper. Heat both the solutions to boiling, cool to room temperature, add 10 ml of concentrated hydrochloric acid to each and dilute to 100 ml with water. Transfer the solutions to two separating funnels, add 35 ml of ether to each, shake vigorously and allow to separate. Draw off the aqueous phases. Proceed for the determination of phosphates as given in **B-6.3.1** in the ether phase. Determine silicate in the aqueous phase as given in **B-6.3.2**.

B-6.3.1 Determination of Phosphate — Wash the ether phase of each funnel from **B-6.3**, by shaking with 10 ml of dilute hydrochloric acid, allow to separate, and drain off and discard the aqueous phase. Add 0.2 ml of freshly prepared stannous chloride solution to each ether extract and shake. If the ether extracts are turbid, wash with 10 ml of dilute hydrochloric acid. Transfer the ether extract to the Nessler cylinders. The limit prescribed for phosphate in Table 1 shall be taken as not having been exceeded if the intensity of the blue colour produced in the test with the material is not greater than that produced in the control test.

B-6.3.2 Determination of Silicate — To the two aqueous phases from **B-6.3**, add 10 ml of concentrated hydrochloric acid and transfer to separating funnel. Add 40 ml of butanol, shake vigorously, and allow to separate. Draw off and discard the aqueous phase. Wash the butanol solution three times with 20 ml portions of dilute hydrochloric acid, discarding the washing each time. Dilute each butanol solution to 50 ml, take 10 ml aliquot from each and dilute to 50 ml with butanol. Add 0.5 ml of a freshly prepared 2 percent stannous chloride solution to each and shake. If the butanol extracts are turbid, wash with 10 ml of dilute hydrochloric acid. Transfer the butanol extracts to the Nessler cylinders. The limit prescribed for silicate in Table 1 shall be taken as not having been exceeded if the intensity of blue colour produced in the test with material is not greater than that produced in the control test.

B-6.4 Spectrophotometric Method for the Determination of Phosphate

B-6.4.1 Apparatus

B-6.4.1.1 Nessler cylinders

B-6.4.2 Reagents

B-6.4.2.1 Standard phosphate solution — Dissolve 0.165 g potassium dihydrogen phosphate dried at 105°C, in water, dilute to 1 000 ml. Add 5 ml of CHCl_3 (1 ml = 0.5 mg PO_4). Prepare standard solution from the above stock having 1 ml = 0.01 mg PO_4 .

B-6.4.2.2 Strong acid solution — Caustiously add 300 ml concentrated sulphuric acid to 600 ml water. Cool and add 4.0 ml concentrated nitric acid and dilute to 1 000 ml.

B-6.4.2.3 Phenolphthalein indicator

B-6.4.2.4 Ammonium molybdate solution

- a) Dissolve 31.4 g ammonium molybdate in 200 ml of water.
- b) Caustiously add 252 ml of concentrated H_2SO_4 to 400 ml of water, mix and cool, add 3.4 ml concentrated HNO_3 . Add solution (a) to solution (b) and dilute to 1 000 ml.

B-6.4.2.5 Amino-naphthol sulphonic acid — Weigh out separately 0.75 g l-amino-2-naphthol-4-sulphonic acid, 42 g sodium sulphite and 70 g sodium metabisulphite. Pulverize the amino-naphthol sulphonic acid with a small proportion of sodium metabisulphite in a clean dry mortar. Dissolve the remaining sodium metabisulphite and sodium sulphite in 900 ml water, add to it ground amino-naphthol sulphonic acid — sodium metabisulphite

mixture and stir to dissolve. Dilute to 1 litre. Store in an amber-coloured bottle.

NOTE — This solution is not stable. Do not keep longer than two weeks.

B-6.4.3 Calibration Curve — Take 2, 4, 6, 8 and 10 ml standard solutions (1 ml = 0.01 mg) in Nessler cylinders and add 2.0 ml ammonium molybdate, mix well and after 5 minutes add 2.0 ml amino-naphthol sulphonic acid and dilute to 50 ml mark. Run a reagent blank. Measure the percentage transmittance at 660 nm using 10 mm cell and adjusting the blank at 100 percent transmittance. Draw a calibration curve of O. D. against concentration of PO_4 .

B-6.4.4 Procedure — Take a suitable aliquot containing 0.02 mg PO_4 or more, evaporate on steam bath until reduced to 1 ml. Transfer quantitatively with water into a 100 ml Nessler cylinder. Add phenolphthalein indicator. If pink colour develops, neutralize it with acid. Add 2.0 ml ammonium molybdate reagent and mix well. After 5 minutes add 20 ml amino naphthol sulphonic acid and dilute to 50 ml mark, mix well. After 5 minutes measure the percentage transmittance at 660 nm and from the graph find out mg PO_4 .

B-6.4.5 Calculation

$$\begin{array}{l} \text{Phosphates (as } \text{PO}_4 \text{),} \\ \text{percent by mass} \end{array} = \frac{A \times 100}{V}$$

where

A = mg/l of PO_4 from the calibration curve, and

V = volume in ml of aliquot of the sample taken for the test.

B-6.5 Spectrophotometric Method for the Determination of Silicate

B-6.5.1 Apparatus

B-6.5.1.1 Spectrophotometer

B-6.5.1.2 Nessler cylinders

B-6.5.2 Reagents

B-6.5.2.1 Sodium bicarbonate — powder.

B-6.5.2.2 Dilute sulphuric acid — 1 N.

B-6.5.2.3 Dilute hydrochloric acid — 1 : 1 (v/v).

B-6.5.2.4 Ammonium molybdate solution — Dissolve 10 g ammonium molybdate in water by warming and dilute to 100 ml. Filter if necessary. Adjust pH 7 to 8 with silica free ammonia or sodium hydroxide. Store the reagent in polyethylene bottle to stabilize.

B-6.5.2.5 Oxalic acid solution — 10 percent.

B-6.5.2.6 Standard silica solution — Dissolve 4.73 g sodium metasilicate nonahydrate ($\text{Na}_2\text{SiO}_3 \cdot 9\text{H}_2\text{O}$) in water and dilute to about 900 ml. Check the concentration and adjust the solution to contain 1 000 mg/l SiO_2 .

Dilute 10 ml of this solution to 1 000 ml. One millilitre of the solution is equivalent to 0.01 mg SiO_2 .

B-6.5.2.7 Reducing agent — Dissolve 500 mg 1-amino-2-naphthol-4-sulphonic acid and 1 g of sodium sulphite in 50 ml water and add this to a solution of 30 g sodium hydrogen sulphite in 150 ml water, filter into a plastic bottle.

B-6.6 Calibration Curve — Take 2.5, 5, 10, 15 and 20 ml standard solution (1 ml = 0.01 mg SiO_2). Add to each 10 ml \times (1 : 1) HCl and 20 ml ammonium molybdate reagent. Mix well and allow to stand for 5 to 10 minutes. Add 5 ml oxalic acid and mix. Wait for 2 minutes and then add 2.0 ml reducing agent. Make up volume to 50 ml. Run a reagent blank. After 5 minutes measure percentage transmittance at 660 wavelength adjusting blank at 100 percent transmittance. Draw a calibration curve of O.D. against mg SiO_2 .

B-6.7 Procedure — Take 10 g of the sample and evaporate on steam bath until the volume reduces to 1 ml. Transfer quantitatively with water into a 100 ml Nessler cylinder and proceed as above (calibration curve). Find mg SiO_2 from the graph.

B-6.8 Calculation

$$\text{Silicate (as SiO}_2\text{), percent by mass} = \frac{A \times 100}{M}$$

where

A = mg of SiO_2 from the calibration curve, and

M = mass in g of the sample taken for the test.

B-7. DETERMINATION OF SULPHATE

B-7.1 Apparatus

B-7.1.1 Nessler Cylinders — 50 ml capacity.

B-7.2 Reagents**B-7.2.1 Ordinary Denatured Spirit****B-7.2.2 Dilute Hydrochloric Acid** — 1 N approximately.**B-7.2.3 Barium Chloride Solution** — Prepare by dissolving 12 g of barium chloride crystals in water and making up to 100 ml.**B-7.2.4 Standard Sulphate Solution** — Dissolve 0.148 g of sodium sulphate in water and make up the solution to 1 000 ml. One millilitre of the solution contains 0.1 mg of sulphate (as SO_4).**B-7.3 Procedure** — Accurately weigh 50 g of the material and evaporate on a steam bath until reduced to 1 ml, dilute with 40 ml of water and 10 ml of denatured spirit, and add 1 ml of dilute hydrochloric acid. Mix and add 1 ml of barium chloride solution, mix immediately. Carry out a control test in the other Nessler cylinder by taking 1 ml of standard sulphate solution (**B-7.2.4**), 10 ml of denatured spirit, 40 ml of water and 1 ml of dilute hydrochloric acid; mix, add 1 ml of barium chloride solution and mix immediately. Allow both the solutions to stand for 1 hour.**B-7.3.1** The limit prescribed in Table 1 shall be taken as not having been exceeded if the turbidity produced with the material is not greater than that produced in the control test.**B-8. TEST FOR SULPHIDE****B-8.1 Reagent****B-8.1.1 Potassium Plumbite** — sulphide-free.**B-8.2 Procedure** — Take 10 g (11 ml) of the material, add 2 drops of potassium plumbite solution. No darkening in colour shall be produced. For comparison, take only test solution in another Nessler cylinder.**B-9. DETERMINATION OF ARSENIC****B-9.1 Procedure** — Take a suitable quantity of the material and evaporate on steam bath so that the test solution contains 1 to 10 μg of arsenic in a final volume of about 5 ml. Determine arsenic by silver diethyl dithiocarbamate method as given in IS : 2088-1983*.**B-10. DETERMINATION OF CALCIUM AND MAGNESIUM****B-10.1 Reagents**

*Methods for determination of arsenic (*second revision*).

IS : 799 - 1985

B-10.1.1 Ammonia-Ammonium Chloride Buffer Solution — Dissolve 67.5 g of ammonium chloride in 300 ml of water, add 570 ml of strong ammonia solution and mix. Make up the volume to 1 000 ml with water.

B-10.1.2 Sodium Sulphide Solution — M/2 approximately.

B-10.1.3 EDTA Solution — M/100. Dissolve 4.0 g of ethylene diamine-tetraacetic acid disodium salt in water, add 20 ml of 1 N sodium hydroxide solution, mix, and dilute to 1 000 ml with water.

B-10.1.4 Methylthymol Blue Indicator — Grind 0.1 g of methylthymol blue with 10 g of potassium nitrate. Add 25 to 50 mg of this mixture to 50 ml of the solution to be titrated.

B-10.2 Procedure — Weigh 80 g (89 ml) of the material and evaporate on a steam bath until reduced to 1 ml. Dilute to 100 ml with water and add 20 ml of ammonia-ammonium chloride buffer solution, a further 20 g (23 ml) of sample and 5 drops of sodium sulphide solution. Titrate with 0.01 M EDTA, using methylthymol blue as indicator until the blue solution becomes colourless or grey.

B-10.2.1 The material shall be taken to have passed the test if not more than 1 ml of 0.01 M EDTA is required for titration.

B-11. DETERMINATION OF COPPER

B-11.1 Apparatus

B-11.1.1 Nessler Cylinders — 50 ml capacity.

B-11.2 Reagents

B-11.2.1 Dilute Sulphuric Acid — approximately 5 N.

B-11.2.2 Diethylammonium Diethyldithiocarbamate Solution — 0.1 percent (m/v) in carbon tetrachloride.

B-11.2.3 Standard Copper Solution A — Accurately weigh 3.93 g of cupric sulphate dissolve in 250 ml of water and add 20 ml of sulphuric acid, make the volume to 1 000 ml with water. One millilitre of the solution contains 1.0 mg of copper (as Cu).

B-11.2.3.1 Standard copper solution B — Dilute 10 ml of standard copper solution A (**B-11.2.3**) to 1 000 ml with water. One millilitre of this solution contains 0.01 mg of copper (as Cu).

B-11.3 Procedure — Accurately weigh 100 g (110 ml) of the material, evaporate on a steam bath until volume is reduced to 2 ml, then dilute with 20 ml of water and add 5 ml of dilute sulphuric acid. Extract the

solution with 10 ml of a 0.1 percent solution of diethyl ammonium diethyldithiocarbamate in carbon tetrachloride by vigorous shaking. Carry out a control test in the other Nessler cylinder by taking 1 ml of standard copper solution (**B-11.2.3.1**), 20 ml of water, 5 ml of dilute sulphuric acid, and 10 ml of 0.1 percent solution of diethylammonium diethyldithiocarbamate in carbon tetrachloride.

B-11.3.1 The limit prescribed for copper in Table 1 shall be taken as not having been exceeded if the intensity of any yellow colour produced in the organic layer, in the test with the material, is not greater than that produced in the control test.

B-12. DETERMINATION OF IRON

B-12.0 Two methods are prescribed for the determination of iron, namely, colorimetric and spectrophotometric methods. The spectrophotometric method shall be regarded as the referee method.

B-12.1 Colorimetric Method

B-12.1.1 Apparatus

B-12.1.1.1 Nessler cylinders — 50 ml capacity.

B-12.2 Reagents

B-12.2.1 Dilute Hydrochloric Acid — approximately 5 N.

B-12.2.2 Potassium Permanganate Solution — approximately 0.1 N.

B-12.2.3 Ammonium Thiocyanate Solution — Dissolve 57.0 g in 100 ml of water.

B-12.2.4 Mixture of Amyl Alcohol and Amyl Acetate — 1 : 1 (v/v).

B-12.2.5 Standard Iron Solution A — Dissolve 0.702 g of ammonium ferrous sulphate in 250 ml of water and 15.0 ml of sulphuric acid, make up the volume to 1 000 ml with water. One millilitre of this solution contains 0.1 mg of iron (as Fe).

B-12.2.5.1 Standard iron solution B — Dilute 50 ml of standard iron solution A (**B-12.2.5**) to 500 ml with water. This solution should be prepared just before use. One millilitre of this solution contains 0.01 mg of iron (as Fe).

B-12.3 Procedure — Accurately weigh 50 g (57 ml) of the material and evaporate on a steam bath until volume is reduced to about 15 ml, then add 3 ml of dilute hydrochloric acid and boil for 2 minutes in the same vessel. Add 1 drop of potassium permanganate solution and mix. Transfer to a Nessler cylinder. Add 5 ml of ammonium thiocyanate solution and 10 ml

of a mixture of equal volumes of amyl alcohol and amyl acetate, shake vigorously and allow to separate. Carry out a control test in the other Nessler cylinder as follows. Take 1 ml of standard iron solution B (**B-12.2.5.1**) and 1 ml of dilute hydrochloric acid and dilute with water to the same volume as the acidified solution of the test sample, add 1 drop of potassium permanganate and from this point follow the procedure described above.

B-12.3.1 The limit prescribed in Table 1 shall be taken as not having been exceeded if the red colour in the organic layer produced in the material is not greater than that produced in the control test.

B-12.4 Spectrophotometric Method

B-12.4.1 Apparatus

B-12.4.1.1 Spectrophotometer

B-12.5 Reagents

B-12.5.1 Dilute Sulphuric Acid Solution — 1:1 (v/v).

B-12.5.2 Hydroxylamine Hydrochloride Solution — 10 percent.

B-12.5.3 Ammonium Acetate Solution — 20 percent.

B-12.5.4 α - α -Dipyridyl Solution — 1 percent in alcohol.

B-12.5.5 Ammonia Solution (*R. D. 0.93*) — 18 percent.

B-12.5.6 Standard Iron Solution A — Dissolve 0.702 g of ferrous ammonium sulphate [$\text{FeSO}_4 (\text{NH}_4)_2 \text{SO}_4 \cdot 6\text{H}_2\text{O}$] in small amount of water. Add 5 ml of concentrated H_2SO_4 and dilute with water up to the mark in 1 000 ml volumetric flask, mix well (1 ml = 0.1 mg Fe).

B-12.5.6.1 Standard iron solution B — Transfer 10 ml of this solution to 1 000 ml volumetric flask and dilute to the mark with water, mix well (1 ml = 0.001 mg = 1 μg Fe).

B-12.6 Calibration Curve — Transfer 2, 5, 10, 15 and 20 ml of standard iron solution in 5 different 100 ml volumetric flasks. Add to each flask 2 ml of (1 : 1) sulphuric acid, 2 ml of 10 percent hydroxylamine hydrochloride, shake and wait for 5 minutes. Add 100 ml of 20 percent ammonium acetate solution and 1 ml of 1 percent α - α -dipyridyl solution. Then add 3.5 ml of 18 percent ammonia solution and dilute to the mark, shake well. Run a reagent blank. Allow to stand for 30 minutes and measure percentage transmittance at 530 nm using 10 mm cell and adjusting blank at 100 percent transmittance. Draw a calibration curve of O.D. against concentration of iron.

B-12.7 Procedure — Accurately weigh 50 g (57 ml) of the sample and reduce the volume to 15 ml evaporating on steam bath. Transfer the material quantitatively with small amount of water into 100 ml volumetric flask. Add 2 ml (1 : 1) sulphuric acid 2 ml of hydroxylamine hydrochloride, shake and allow to stand for 5 minutes. Add 10 ml of ammonium acetate solution, mix and add 1 ml of α - α -dipyridyl solution and 3.5 ml of 18 percent ammonia solution. Dilute to the mark with water. Run a reagent blank. Allow to stand for 30 minutes and measure percentage transmittance at 530 nm adjusting blank at 100 percent transmittance. Find out iron from the graph.

B-12.8 Calculation

$$\text{Iron (as Fe), percent by mass} = \frac{X}{M \times 10^4}$$

where

X = μg iron from the graph, and

M = mass in g of the sample taken for the test.

B-13. DETERMINATION OF HEAVY METALS

B-13.1 Apparatus

B-13.1.1 Nessler Cylinders — 50 ml capacity.

B-13.2 Reagents

B-13.2.1 Dilute Hydrochloric Acid Solution — approximately 5 N.

B-13.2.2 Dilute Ammonia Solution — 30 percent (v/v).

B-13.2.3 Dilute Acetic Acid Solution — 30 percent (v/v).

B-13.2.4 Standard Lead Solution — Dissolve 0.160 g of lead nitrate in 250 ml of water and 40 ml of nitric acid and make up the volume to 1 000 ml with water. One millilitre of the solution contains 0.1 mg of lead.

B-13.2.4.1 Standard solution B — Dilute 50 ml of standard lead solution A (**B-13.2.4**) to 500 ml with water. This solution should be prepared just before use. One millilitre of this solution contains 0.01 mg of lead (as Pb).

B-13.3 Procedure — Accurately weigh 40 g (45 ml) of the material, boil until the volume is reduced to 15 ml, add 2.5 ml of dilute hydrochloric acid and boil for 2 minutes in the same vessel. Cool, dilute to 20 ml and add

IS : 799 - 1985

30 ml of water and 10 g (11 ml) of the sample. Pass hydrogen sulphide through the solution for a few seconds. Carry out a control test in the other Nessler cylinder as follows. Mix 2.0 ml of the standard lead solution B (**B-13.2.4.1**) with 3 ml of dilute acetic acid. Add standard iron solution equivalent to the amount of iron present in the test solution, as per **B-12**, dilute to 40 ml with water, add 10 ml of dilute ammonia solution pass hydrogen sulphide through the solution for a few seconds.

B-13.3.1 The material shall be taken to have not exceeded the limit given in Table 1 if the turbidity produced in the test with material is not greater than that produced in the control test.

B-14. TEST FOR REDUCING SUBSTANCES

B-14.1 Reagents

B-14.1.1 *Dilute Sulphuric Acid* — approximately 5 N.

B-14.1.2 *Potassium Permanganate Solution* — 0.1 N.

B-14.2 Procedure — Weigh 10 g (11 ml) of the material, add 50 ml of dilute sulphuric acid and 1.0 ml of 0.01 N potassium permanganate solution and boil the mixture gently for 5 minutes.

B-14.2.1 The material shall be taken to have passed the test if the pink colour of potassium permanganate is not completely discharged.

B-15. TEST FOR PYRIDINE AND HOMOLOGUES

B-15.1 Measure the optical density of the sample in a 1-cm quartz of silica cell at a wavelength of 252 nm, using a water blank. The optical density should not be greater than 0.045.

APPENDIX C

(Clause 5.1)

SAMPLING OF AMMONIA, LIQUOR

C-1. GENERAL REQUIREMENTS

C-1.0 In drawing samples, the following precautions and directions shall be observed.

C-1.1 Ammonia, liquor, is volatile and highly toxic and requires care in sampling.

C-1.1.1 It is advisable that the sampler wears goggles to protect the eyes and observes the other precautions prescribed in IS : 4544-1968*.

C-1.2 Samples shall not be taken in an exposed place.

C-1.3 The sampling instruments shall be clean and dry when used.

C-1.4 Precautions shall be taken to protect the samples, the material being sampled, the sampling instruments and the containers for samples from adventitious contamination.

C-1.5 Use care in opening the container as a portion of the contents may blow out violently due to pressure of ammonia gas. Cool the container before opening, especially during warm season. Hold it away from the eyes and then slowly remove the cap or stopper.

C-1.6 The samples shall be placed in clean, dry and air-tight screw cap polyethylene bottles.

C-1.7 The sample containers shall be of such a size that they have about 10 percent ullage when filled with the material.

C-1.8 Each sample container shall be sealed air-tight after filling and marked with full details of sampling, the date of sampling and year of manufacture of the material.

C-1.9 Samples shall be stored in a cool place.

C-2. SCALE OF SAMPLING

C-2.1 Lot — All containers in a single consignment of the material of the same grade and drawn from a single batch of manufacture shall constitute

*Code of safety for ammonia.

IS : 799 - 1985

a lot. If a consignment is declared to consist of different batches of manufacture, the containers belonging to the same batch shall be grouped together and each such batch shall constitute a lot.

C-2.2 For ascertaining the conformity of the material to the requirements of this specification, samples shall be tested for each lot separately.

C-2.3 The number of containers to be selected from a lot shall depend on the size of the lot and shall be in accordance with Table 2.

TABLE 2 NUMBER OF CONTAINERS TO BE SELECTED FOR SAMPLING

LOT SIZE	NUMBER OF CONTAINERS TO BE SELECTED
(1)	(2)
Up to 15	2
16 to 25	3
26 „ 50	4
51 „ 100	5
101 „ 300	6
301 „ 500	7
501 „ 800	8
801 „ 1 300	9
1 301 and above	10

C-2.3.1 These containers shall be selected at random. In order to ensure the randomness of selection the procedures given in IS : 4905-1968* shall be followed.

C-3. TEST SAMPLES AND REFEREE SAMPLE

C-3.1 From each of the containers selected according to **C-2.3**, representative portion of the material shall be taken with the help of an appropriate sampling instrument after thoroughly mixing the contents of the container.

C-3.2 A small but approximately equal quantity shall be taken from each of these portions and well mixed to prepare a composite sample, the quantity of which shall not be less than 3.0 kg. The composite sample shall be divided into three equal parts, one for the purchaser, another for the supplier and the third to be used as a referee sample.

C-3.3 The remaining portion of the material from each container shall be divided into three equal parts, each constituting an individual sample. One

*Methods for random sampling.

set of individual samples shall be marked for the purchaser, another for the supplier and the third to be used as a referee sample.

C-3.4 To prevent loss of ammonia when transferring samples from one container to another, all the containers selected for sampling and the receiving containers shall be cooled in ice or cold water-bath at 5 to 10°C. All transfers of the samples shall be done as quickly as possible.

C-3.5 All the individual and composite samples shall be transferred immediately to thoroughly dried screw cap polyethylene bottles. These bottles shall be sealed and labelled with full identification particulars.

C-3.6 The referee sample consisting of a composite sample and a set of individual samples shall bear the seals of purchaser and supplier. It shall be kept at a place agreed to between the purchaser and the supplier, to be used in case of a dispute.

C-4. NUMBER OF TESTS

C-4.1 Ammonia content shall be tested on each of the individual samples.

C-4.2 Tests for the determination of the remaining characteristics given in Table 1 shall be performed on the composite sample.

C-5. CRITERIA FOR CONFORMITY

C-5.1 Individual Samples — The lot shall be considered to have satisfied the requirements of ammonia if each of the individual samples tested for ammonia, satisfies the corresponding requirement given in Table 1 for the relevant grade.

C-5.2 Composite Samples — The lot shall be considered to have met the requirement for remaining characteristics given in Table 1 if all the test results on the composite sample satisfy the corresponding requirements given in Table 1.

C-5.3 The lot shall be declared as conforming to the requirements of this specification if **C-5.1** and **C-5.2** are satisfied.

IS : 799 - 1985

(Continued from page 2)

Members

SHRI P. S. HARIHARAKRISHNAN

SHRI JAI GOPAL JAIN

SHRI N. V. KAMBLE

SHRI L. K. MALAVIYA (*Alternate*)

SHRI K. K. KRISHNAMURTHY

SHRI A. M. VAIDYA (*Alternate*)

SHRI MANMOHAN SINGH

SHRI P. L. BURMAN (*Alternate*)

SHRI J. S. MATHARU

SHRI R. C. BHATTACHARYA (*Alternate*)

SHRI R. N. MODY

SHRI R. S. VAIDYANATHAN (*Alternate*)

DR B. S. NAGAR

SHRI N. R. FADNIS (*Alternate*)

DR ANIL PANDIT

SHRI J. T. VORA (*Alternate*)

SHRI D. SESHASAYEE

SHRI R. V. RAMANI (*Alternate*)

SHRI M. P. SHENOY

SHRI C. K. SOMANY

SHRI P. K. JAIN (*Alternate*)

SHRI J. S. TALWAR

SHRI T. L. BOLIA (*Alternate*)

Representing

The Travancore Rayons Ltd, Rayonpuram

Dhrangadhra Chemical Works Ltd, Dhrangadhra

Saurashtra Chemicals, Porbandar

Tata Chemicals Ltd, Bombay

Indian Paper Mills Association, Calcutta

Directorate General of Technical Development,
New Delhi

Indian Soap & Toiletries Makers' Association,
Bombay

Indian Dyestuff Industries Ltd, Bombay

Deepak Nitrite Ltd, Vadodara

The Mettur Chemical & Industrial Corporation
Ltd, Mettur Dam

The Tata Oil Mills Co Ltd, Bombay

The All India Glass Manufacturers' Federation,
New Delhi

Ballarpur Industries Ltd, New Delhi

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002

Telephones 23230131, 23233375, 23239402

Fax 91+011 23234062, 23239399, 23239382

E-mail: bis@vsnl.com

website <http://www.bis.org.in>

Central Laboratory:

Plot No 20/9, Site IV, Sahibabad Industrial Area, SAHIBABD 201010

Telephone

2770032

Regional Offices:

Central Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002

23237617

*Eastern, 1/14 CIT Scheme VII M, V I P Road Kankurgachi, KOLKATA 700054

23378662

Northern SCO 335-336, Sector 34-A, Chandigarh 160022

603843

Southern C I T Campus IV Cross Road, CHENNAI 600113

254 19 84

Western Manakalaya, E9, MIDC, Behind Marol Telephone Exchange,

2832 92 95

Andheri (East), MUMBAI 400093

Branch offices:

'Pushpak' Nurmohamed Shaikh Marg, Khanpur, AHMEDABAD 380001

560 13 48

Peenya Industrial Area, 1st Stage, Bangalore-Tumkur Road, BANGALORE

839 49 55

Commercial-cum-office Complex, opp Dushera Maidan, Arera Colony,

242 34 52

Bittan Market, BHOPAL 462016

62/63, Ganga Nagar, Unit VI, BHUBANESHWAR 751001

240 3139

5TH Floor, Kovai Towers, 44 Bala Sundaram Road, COIMBATORE 641018

221 0141

SCO 21, Sector 12, Faridabad 121007

2292175

Savitri Complex, 116 G T Road Ghaziabad 201001

2861498

53/5 Ward No 29, R G Barua Road 5 by-lane, Apurba Sinha Path

2541137

GUWAHATI 781003

5-8-56C L N Gupta Marg, Nampally Station Road, HYBERABAD 500001

23201084

E-52, Chitranjan Marg, C-Scheme, JAIPUR 302001

2373879

117/418 B Sarvodaya Nagar, KANPUR 208005

2218774

Sethi Bhavan 2nd Floor, Behind Leela Cinema, Naval Kishore Road,

2215698

LUCKNOW 226001

NIT Building, Second Floor, Gokulpat Market, NAGPUR 440010

2525171

Mahavir Bhavan, First Floor, Ropar Road, NALAGARH 174101

221451

Patliputra Industrial Estate, PATNA 800013

2262808

First Floor, Plot Nos 657-660, Market Yard Gultkdi, PUNE 411037

4268659

"Sahajanand House" 3rd Floor, Bhaktinagar Circle, 80 Feet Road,

2378251

RAJKOT 360002

T C No 14/1421, University P O Palayam, THIRUVANANTHAPURAM 695034

2322104

1st Floor, Udyog Bhavan, VUDA, Siripuram Junction, VISHAKHAPATNAM-03

2712833

Sales Office is at 5 Chowringhee Approach, P O Princep Street, Kolkata 700072

22371085

Sales Office is at Novelty Chambers, Grant Road, MUMBAI 400007

23096528